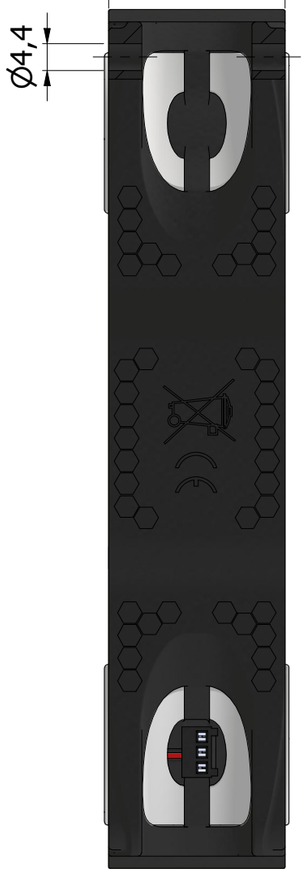

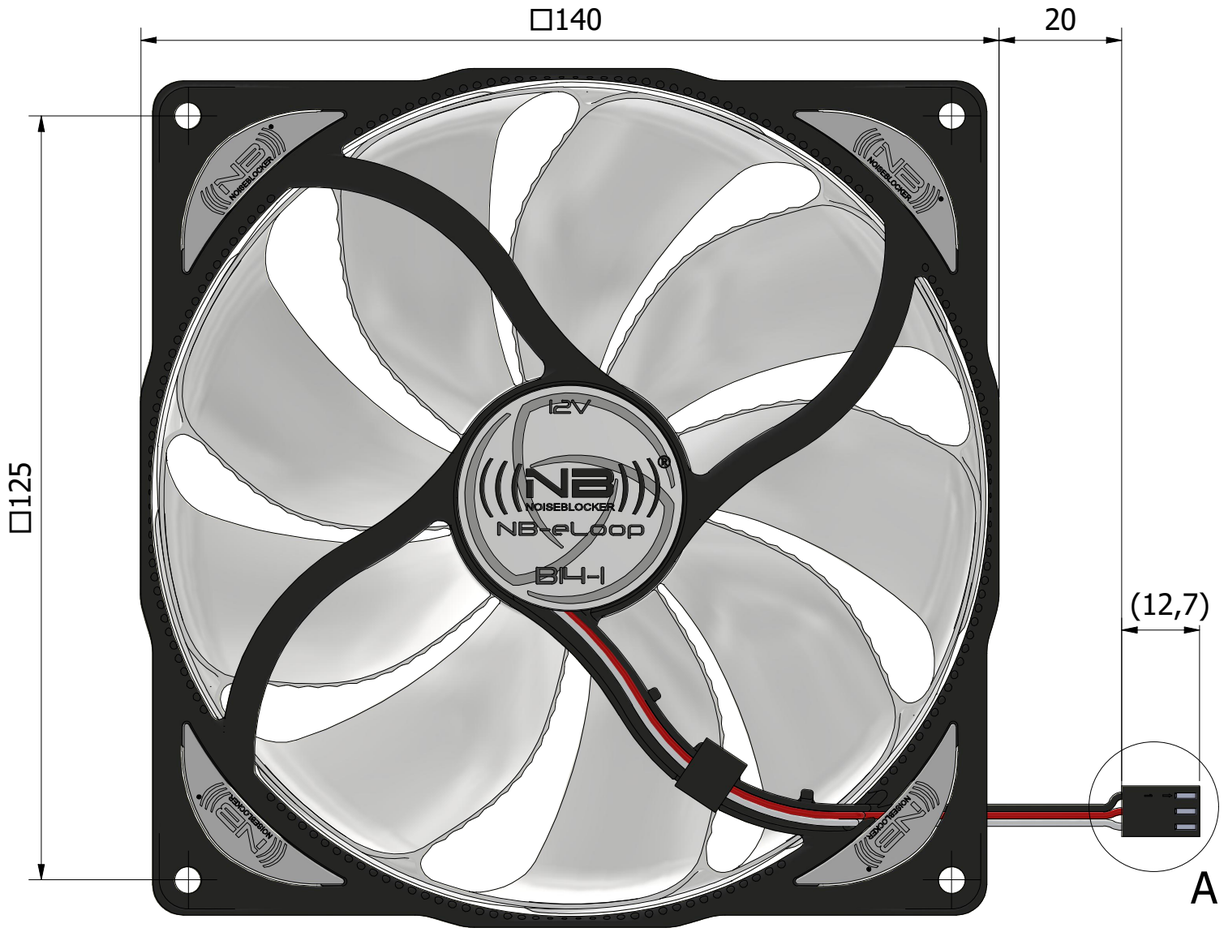

Luftstrom
airflow

Rotation
rotation

A (2 : 1)
KK 254 Crimp Housing or similar

Pin1 (schwarz) - Masse
Pin 1 (black) - ground
Pin 2 (rot) - Spannung
Pin 2 (red) - voltage
Pin 3 (weiß) - Tacho
(für Betrieb nicht erforderlich)
Pin 3 (white) - tacho
(not needed to run)

isometric 1:2

technische Spezifikationen technical specifications	
Drehzahl: rotation speed:	600 U/min
Lagerart: bearing type:	NB-NanoSLI® 2
Steuerung: control:	-

Allgemeintoleranzen: ---
general tolerances:

Oberflächenangaben: ---
surface data:

Schutzvermerk: DIN ISO 16016
protection note:

Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Geschmacksmustereintragung vorbehalten.
The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

NUR ZUR INFORMATION
UNTERLIEGT NICHT DEM ÄNDERUNGSDIENST!

ONLY FOR INFORMATION
IS NOT SUBJECT OF THE REVISION SERVICE!

Maßstab: 1 : 1
size:

Blatt: 1/1
sheet:

A3

Metrisch
metric

	Datum / date	Name
Angelegt created	02.03.2023	TW
Bearbeitet changed	02.03.2023	TW
Geprüft checked	02.03.2023	TW

BLACKNOISE® technology group

www.blacknoise.com

Zubehöhr: Montageset, je 1x 20 u. 50 cm Anschlusskabel
accessories: mounting kit, 1x 20 and 50 cm connection cable each

Material: ---
material:

theor. Gewicht: 0,200 kg
theor. weight:

Art.-Nr.: **12NBR14290640** B-C
part no.:

Zeich.-Nr.: 499 1429 00
draw no.:

Art.-Nr. Kunde: B14-1
part no. cust.:

Bezeichnung: NB-eLoop
DC 12 V Axiallüfter 140x140x25 mm

name: NB-eLoop
DC 12 V axial fan 140x140x25 mm